


LED DRIVER MULTIPOWER DIM



7040 LED



Dimensioni (mm) - Dimensions (mm)

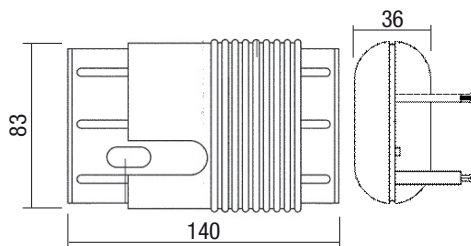

Codice Code	LPH mm	Vdc IN	Vac IN	Hz	18A	iC	ta °C	tc °C	PFC	Euro Cad.
RL4720/LED	140x88x36	176-264	110-240	50/60	25	20A 170µS	0..35	85	OK	36,00

7040 LED		CDT															
Iout	mA	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050
Vout	Vdc	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46
Power	W	14	17	19	21 (20)	24 (20)	26 (20)	28 (20)	30 (20)	32 (20)	34 (20)	36 (20)	38 (20)	40 (40)	40 (20)	40 (20)	40 (20)
N° LED typical VF 3,2V	min - max	1÷15	1÷15	1÷15	1÷15	1÷15	1÷15	1÷15	1÷14	1÷14	1÷14	1÷14	1÷14	1÷14	1÷13	1÷13	1÷12
COB - Typical VF 37V																	

Alimentatore elettronico dimmerabile a cursore, da pavimento per moduli LED a corrente costante CDT (vedi tabella). Per uso indipendente.

Caratteristiche tecniche

- Alimentatore multipotenza dimmerabile fornito di dip-switch per la selezione della corrente in uscita.
- Regolazione a cursore.
- Accensione e spegnimento con interruttore.
- Alimentatore indipendente IP20, per uso interno.
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Uscita in corrente costante (CDT).
- Protezioni: al cortocircuito, contro le extra-tensioni di rete, contro i sovraccarichi.
- Morsetti di entrata e uscita sullo stesso lato.
- CDT connessione moduli led in serie
- Colore: Nero (a richiesta colore trasparente - RL4740/LED).

Floor dimmable electronic power supply unit with cursor for direct current LED modules CDT (see table). For independent use.

Technical features

- Dimmable multipower power supply unit equipped with a dip-switch to select the output current.
- Cursor adjustment.
- Switch on and off with switch.
- IP20 independent power supply unit, for indoor use.
- Class II protection against electric shocks by direct and indirect contact.
- Constant current output (CDT).
- Protections: against short circuit, against extra network voltage, against overloads.
- Input and output terminals on the same side.
- LED modules CDT connection in series
- Colour: Black (on request transparent colour - RL4740/LED)

Norme di riferimento

Reference norms

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

Esempio applicativo - Application example

