




Dimensions: (mm/inches)

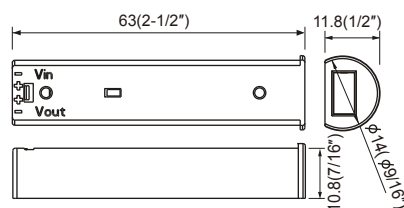


■ Sensor (Options)

Sensor	Hole opening diameter(D)
	$\phi 13\text{mm}(\phi 1/2")$ $\phi 11\text{mm}(\phi 7/16")$


■ Features

- IR sensor for LED lighting
- With 2 selectable functions

■ HZK221

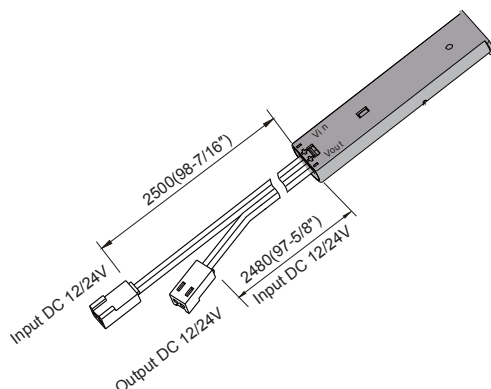

■ HZK231

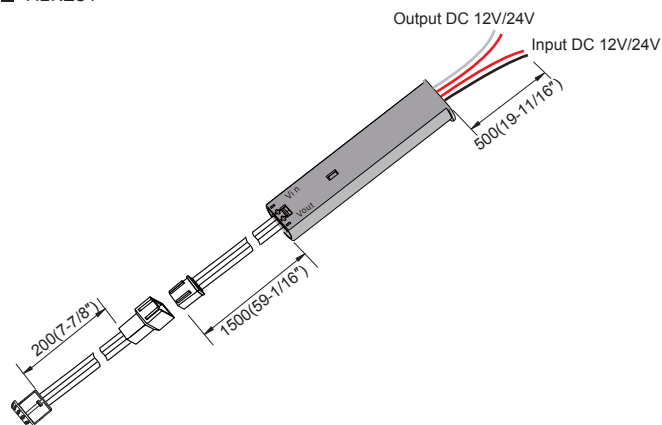

■ Application

Model No.	Rated supply	Rated load	ta	Detect range	Other function	L x W x H
HZK221	DC 12V	Max.15W	-20~35°C	Less than 5cm(2") is recommended	Function set *Memory function	63x10.8x11.8mm (2-1/2"x7/16"x1/2")
	DC 24V	Max.30W				
HZK231	DC 12V	Max.15W	-20~35°C	Less than 5cm(2") is recommended	Function set *Memory function	63x10.8x11.8mm (2-1/2"x7/16"x1/2")
	DC 24V	Max.30W				

*Memory function: In case of power failure, the device will return to its previous state prior to power cut off.