


# CV Phase Cut Series

## SLD75-12/24VL-E

Best seller



### Dimensions: (mm)

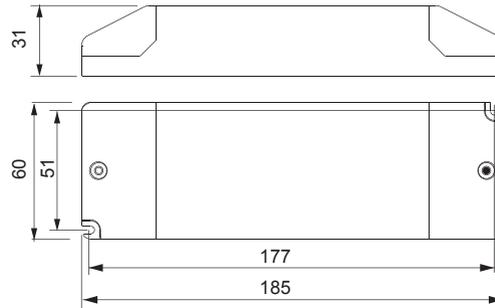

- Independent power supply for constant voltage LED lamp
- Terminal block for quick connection
- Class II protection against electric shock from direct and indirect contact
- No-filker
- SELV output
- Fast start-up time  $\leq 0.5s$
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- The output current of the power supply could be dimmed between 5%-100% by trailing edge or leading edge dimmers.
- Efficiency:86.5% (AC230V, full load)
- Guarantee: 5 Years

### Specifications

Model	Rated input	PF	Output	Output Power range	Tolerance	Efficiency	ta	tc	Size	Approval
SLD75-12VL-E*	AC220-240V	0.95	12VDC	12-75W	+/-5%	85.0%	45 C	85 C	185×60×31mm	CE
SLD75-24VL-E*	AC220-240V	0.95	24VDC	12-75W	+/-5%	86.5%	45 C	80 C	185×60×31mm	CE

\*For product datasheet go to [www.self-ecg.com](http://www.self-ecg.com) or available on request.