

LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies current and voltage constant Led power supplies current and voltage constant 700mA

## G503706J

# LED power supply CV CC SLT6-700IL-4 700mA (12Vdc) 6W

SCONSTRUCTION SOLUTION SOLUTIO

#### DESCRIPTION

Led power supply unit that can work depending on the load identified, with a constant voltage output of 12Vdc or a constant current of 700mA. Working at 12Vdc voltage, the power range is from 0 to 6W. Working at a constant current of 700mA, the output voltage ranges from 3 to 9V and the power range is from 2 to 6.3W. To CV loads connected in parallel and to CC loads connected in series. Protection against open circuit, short circuit, over load and over temperature. Automatic reset in case of fail

#### PRICE

|                 | Lot | P.V.P. excluding VAT |
|-----------------|-----|----------------------|
|                 | 1   | 11,10€               |
|                 | 5   | 9,26€                |
|                 | 10  | 8,41€                |
|                 | 50  | 7,80€                |
| 8 435100 530904 |     |                      |

May 18th, 2024, 17:47




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies current and voltage constant Led power supplies current and voltage constant 700mA

### G503706J

# LED power supply CV CC SLT6-700IL-4 700mA (12Vdc) 6W

### **TECHNICAL SPECIFICATIONS**

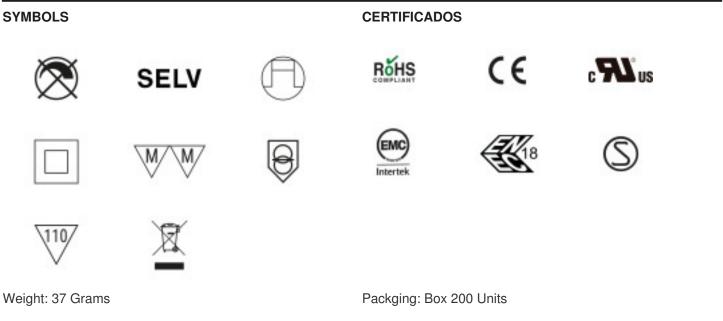

#### NOTES

ECO design according to ERP directives. Led Power supply voltage 12VDC or constant current 700mA depending on load

### **OTHER FEATURES**

MEEI (Hungary) SEMKO (Sweden)

| Length (mm): 68                                      | Width (mm): 35                 |  |  |
|--|--------------------------------|--|--|
| High (mm): 20  | Colour: White                  |  |  |
| Voltage In (Vac): 100~240                            | Voltage Out (Vdc): 3~8.4       |  |  |
| Intensidad Out (A): 0~0.7                            | Frecuency (Hz): 50~60          |  |  |
| Power (W): 6   | Room Temperature (°C): -20~+40 |  |  |
| Critical Temperature (°C): 70                        | Life (Hours): 50000            |  |  |
| Ingress Protection: IP20                             | Dimmable: NO                   |  |  |
| Power factor: 0,40                                   |                                |  |  |
| DOCUMENTS  |                                |  |  |
| Pata Sheet   |                                |  |  |
| LED power supply CV CC SLT6-700IL-4 700mA (12Vdc) 6W |                                |  |  |
|  |                                |  |  |