


G5K000P2C

Module GPC D28mm. 6 led SAMSUNG 2700K CRI90 50cm AWG22

May 26th, 2024, 04:51

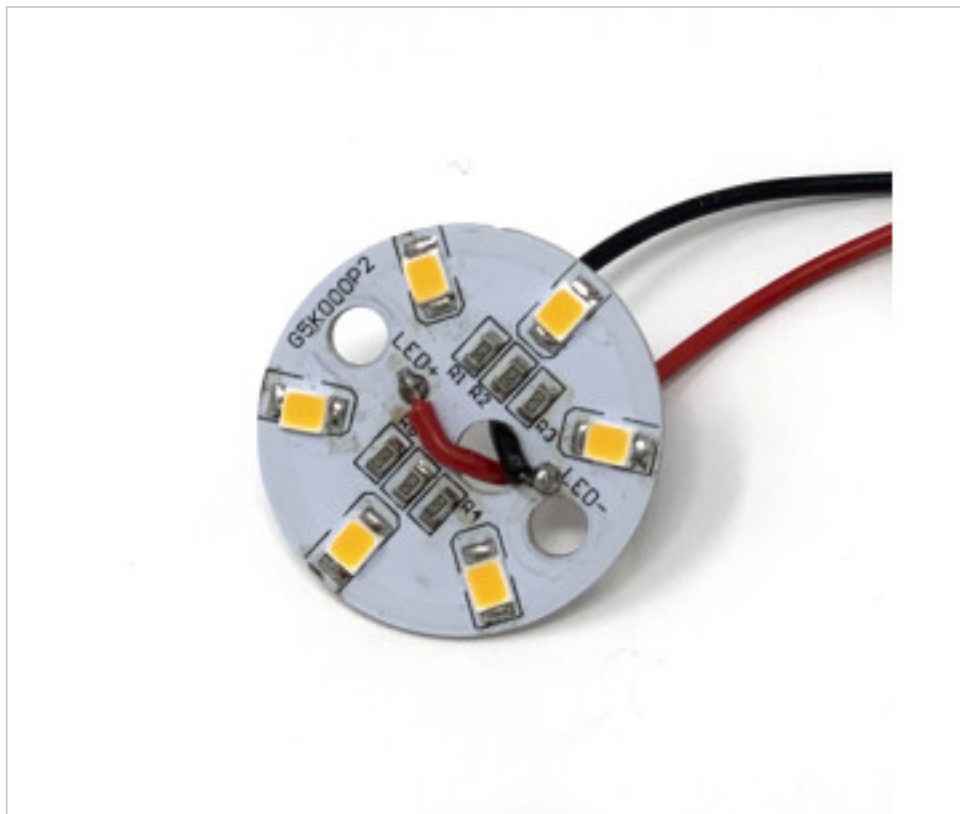

DESCRIPTION

Aluminum plate with a diameter of 28 mm. With 2 holes of 4mm in diameter for fixing and with 6 led 2835 SAMSUNG 2700K CRI90 120Lm / W. Wired with 50cm of AWG22 red (+) and black (-) cable. The connection to the control board is made with push-in pin connectors. Depending on what has been selected on the control board, the luminosity will be 150lm (1.3W) or 250lm (2.1W). This led board is designed to work exclusively with our configurable control boards.

PRICE

	Lot	P.V.P. excluding VAT
	1	3,50€
	10	3,17€
	50	2,89€
	100	2,76€



Continued on next page >>

LED TECHNOLOGY > Led modules > Battery Led Modules
Configurable Led battery modules

G5K000P2C

Module GPC D28mm. 6 led SAMSUNG 2700K CRI90 50cm AWG22

TECHNICAL SPECIFICATIONS

SYMBOLS



CERTIFICADOS



Weight: 8 Grams

Packging: Box 1 Unit

NOTES

Aluminum plate 28mm diameter. According to selection on the control board 150lm or 250lm.

OTHER FEATURES

Diameter (mm): 28

Voltage In (Vdc): 3.7

Colour Temperature (°K): 2700

Lumen/Watt: 120

Energy efficiency: G

CRI (≥): 90

Ingress Protection: IP20

Dimmable: SI

DOCUMENTS



[Data Sheet](#)



[CE](#)