


CV Version Super thin LED Power Supply



Dimensions: (mm/inches):

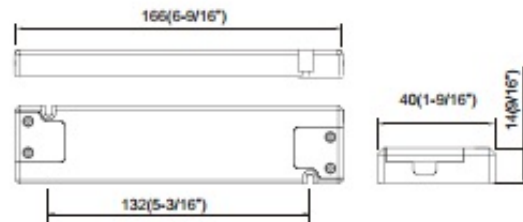

■ Features

- Independent power supply for constant voltage LED lamp
- Special design screw terminal for field connection
- Mini DC socket at the secondary side for quick connection
- Class II protection against electric shock from direct and indirect contact
- SELV output
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- No load power consumption ≤ 0.3W
- Efficiency ≥ 83% (AC230V, full load)

Super thin 14mm
Thickness only

■ Standards

EN 61347-1
EN 61347-2-13
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61547



NEW direct plug-in feature!

■ Characteristics

Rated input voltage: AC220-240V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	λ	t_a	t_c	L x W x H	Approval
SLT20-12VFG SLT20-12VFG(DC)★	DC12V	0-20W	0.50C	-20-50°C (-4-122°F)	85°C (185°F)	166x40x14mm (6-9/16"x1-9/16"x9/16")	SEMKO
SLT20-24VFG SLT20-24VFG(DC)★	DC24V	0-20W	0.50C	-20-50°C (-4-122°F)	85°C (185°F)	166x40x14mm (6-9/16"x1-9/16"x9/16")	SEMKO

★ Additional DC Socket output for Model No. with Suffix-DC