

15W LED Driver IP44

LED Driver 12V/24V 15W





#### **Features**

- Constant Voltage;
- Protection: Overload Protection/Overvoltage Protection
- All in one plastic defending shell;
- Class II Protection;
- For interior LED light use
- 100% full-loaded Aging Test;
- 3 years warranty.


#### **Parameters**

Model		AED15-12VLSTB-IP44	AED15-24VLSTB-IP44
Output	Output Voltage	12V	24V
	Voltage Accuracy	+-5%	+-5%
	Output Current	1250mA	625mA
	Output Rated Power	15W	15W
	Max. No Load Voltage	14V	27V
	Load Regulation	+-5%	
Input	Voltage Range	198-264VAC	198-264VAC
	Frequency Range	47-63Hz	47-63Hz
	Efficiency (Typ.)	83%	83%
	Input Current	200mA	200mA
	Surge Current (Max)	20A	
	Leakage Current	-	
	Line Regulation	+-5%	
	Start Up Time	0.5s@230VAC	

Protection	Overload	Output stop when it is greater than 130% of the rated output power. Output will be restored after the abnormality is removed.	
	Overvoltage	Output stop when the load voltage exceeds 110%. Output will be restored after the abnormality is removed.	
Environment	Operating Temperature/Humidity	-20°C∼40°C/20%∼90% RH	
	Storage Temperature/Humidity	-20°C~80°C/10%~95% RH	
	Vibration	10-500Hz, 2G 10mins per period, 60min on each X, Y, Z axis	
	Max Noise (Remarks 2)	24DB	
	Safety Specification (Remarks 6)	EN61347-1, EN61347-2-13	
Safety and	Withstand Voltage	I/P-O/P: 3750VAC 5mA 1 minute	
Electromagnetic	Insulation Resistance	I/P-O/P: 1000Mohms/500VDC/20°C/70%RH	
Compatibility	Electromagnetic Compatible Emission	EN55015: 2013 EN61000-3-2/GB 17625.1 EN61000-3-3	
	Electromagnetic Compatibility Imunity	EN61547 EN61000-4-2	
	Lifetime	30,000H	
	Size	145mm*41mm*13.5mm	
	Packaging	Each in PE bag, 100PCS in one 31*22*16cm carton	
	1. If not stated, all parameters are test under 230VAC input, rated load and 25°C Ta; 2.Noise Test: Test from 300mm from the product in a sound-proof box;		
Remarks	3. Derating output is required at low input voltage. Please refer to the static characteristic for details.		
	4. Drivers and switches area use with the end product. Because EMC test will be influenced by		
	the whole end product set, end product manufacturer will need to do EMC test again to confirm;		
	5. The start-up time is measured in the cold start state. Continuous switching on and off may make the start-up time longer.		
	6. Can be adapt to end product passed CE TUV(EN61347-1, EN61347-2-13). Pls contact Letaron for more details.		

## \*Mechanical Drawings


# \*Unit of Length: mm

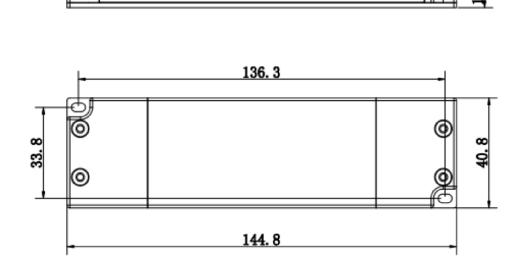


## \*Wiring Diagram




## \*Block Diagram



### \*Deduction Curve

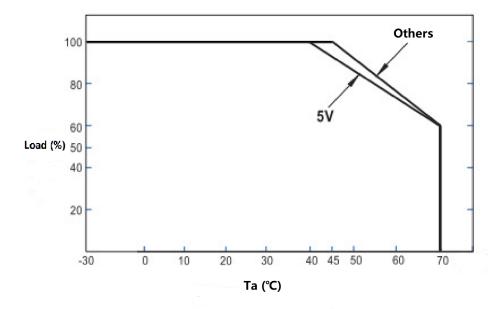

### **\*Static Characteristic**



Input Voltage(VAC)60Hz