


LED-Dimmer 4-kanalig für Konstantspannung bis 192 W / Kanal  
 LED dimmer 4 channel for constant voltage up to 192 W / channel

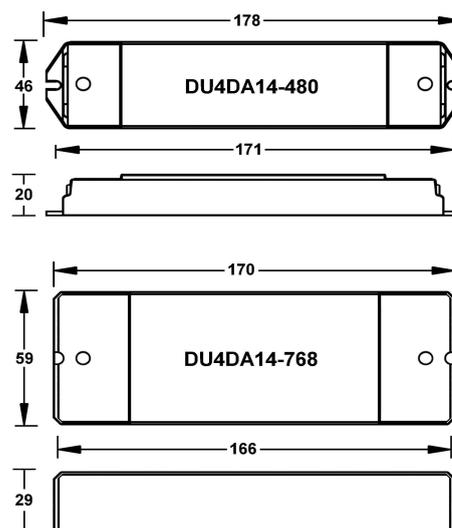

Technische Daten *Technical data*

	max. 480 W	max. 768 W
Artikelnummer <i>Part no.</i>	800650	800651
Typ <i>Type</i>	DU4DA14-480	DU4DA14-768
Eingangsspannung <i>Input voltage</i>	12..24 Vdc	
Ausgangsspannung <i>Output voltage</i>	12..24 Vdc	
Max. Ausgangsleistung bei 12 Vdc <i>Max. output power at 12 Vdc</i>	4 x 60 W	4 x 96 W
Max. Ausgangsleistung bei 24 Vdc <i>Max. output power at 24 Vdc</i>	4 x 120 W	4 x 192 W
PWM-Frequenz <i>PWM frequency</i>	500 Hz	
Steuerstrom max. <i>Control current max.</i>	1,5 mA	
Max. Bemessungstemperatur (tc) <i>Rated max. temperature (tc)</i>	75 °C	
Abmessungen <i>Dimensions</i>	178 x 46 x 20 mm	170 x 59 x 29 mm

- 4-kanaliger Dimmer für LEDs für konstante Spannung
- Ansteuerung nur durch DALI mit SELV-Potential
- 4 Kanäle mit aufeinanderfolgenden Adressen, einstellbar:
  - einen Knopf lange drücken bis Anzeige blinkt (Adresse des ersten Kanals)
  - rechts / links drücken zum Einstellen
  - lange drücken zum Speichern oder Adressierung durch DALI-Steuerung
- Geeignet zur Ansteuerung durch CASAMBI-Schnittstellen

- 4 channel LED dimmer for constant voltage
- To be controlled only by DALI with SELV potential
- 4 channels with successive addresses, adjustable:
  - press and hold any button until display flashes (address of first channel)
  - press right / left button to adjust
  - press and hold for saving or addressing by DALI controller
- Adapted to be controlled by CASAMBI interfaces

