


LED TECHNOLOGY > Led modules > Battery Led Modules Configurable Led battery modules

G5K000P3

Module Crown GPC D100mm. 20 led Samsung 3000K CRI90 50cm AWG22

May 05th, 2024, 14:37

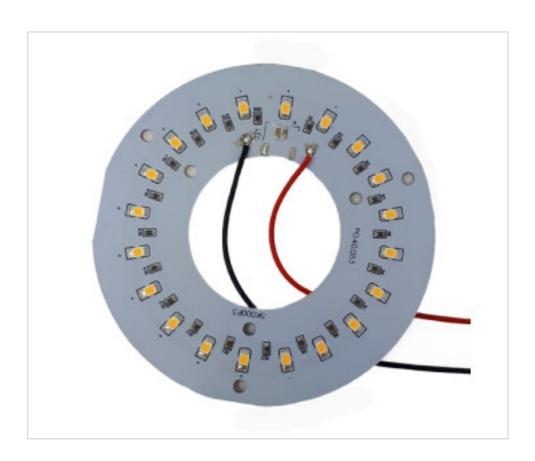

DESCRIPTION

Aluminum circular crown plate with an outer diameter of 100mm and an inner diameter of 40mm .. With 4mm diameter holes at 120° for fixing and with 20 LEDs 2835 SAMSUNG 3000K CRI90 120Lm / W. The connection to the control plate is made with connectors of pressure pin. Wired with 50cm of AWG22 red (+) and black (-) cable. Depending on the selection on the control board, the luminosity will be 170lm (1.4W) or 315lm (2.6W). This led board is designed to work exclusively with our battery-powered led modules.

PRICE

Lot	BVB evoluting VAT
LOU	P.V.P. excluding VAT
1	9,41€
10	8,56€
50	7,43€
100	7,08€





LED TECHNOLOGY > Led modules > Battery Led Modules Configurable Led battery modules

G5K000P3

Module Crown GPC D100mm. 20 led Samsung 3000K CRI90 50cm AWG22

TECHNICAL SPECIFICATIONS

SYMBOLS CERTIFICADOS









Weight: 30 Grams

NOTES

Aluminum plate 100mm diameter. According to selection on the control board 170lm or 350 Lm

OTHER FEATURES

Diameter (mm): 100 Voltage In (Vdc): 3.7 Colour Temperature (°K): 3000 Lumen/Watt: 120

CRI (≥): 90 Ingress Protection: IP20

Dimmable: SI

DOCUMENTS

EPREL Datasheet

Data Sheet